



Bollards made up of a solid machined stainless steel head fixed on a solid turned wood body.
PMR model with brushed stainless steel constrat strip.
Depth of seal 200 mm. Provide a draining layer at the bottom of the reservation for water run-off.

Finishes

Wood : Insulation by bath then 2 layers of wood stain.
Head : Circular-brushed .

References

Fixed post $\varnothing 124$: **N16**

PMR fixed bollard $\varnothing 124$: **N53**


Fixed bollard $\varnothing 178$ height above ground 500 mm : **N18**

Fixed bollard $\varnothing 178$ height above ground 700 mm : **N76**

Options

Manufactured in 316L stainless steel on request.

Bollard $\varnothing 124$

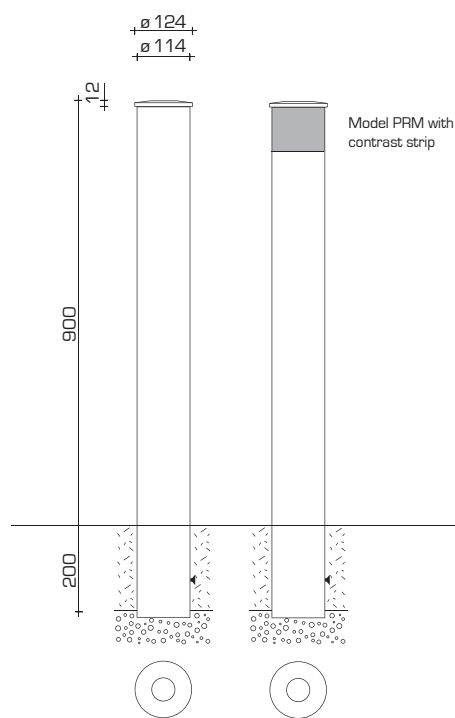

Bollards $\varnothing 178$

